


## 5-Lobe Pin - Button Head Self Tapper - A4-70 Stainless Steel

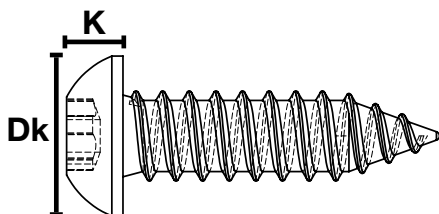

### Dimensions (mm)

BOX QTY 100

DIAMETER	LENGTH	Dk	K	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	DRIVER SIZE
				13mm	19mm	25mm	25mm	38mm	50mm	63mm	75mm	
No. 6	3.5mm	5.7	2.5	FLPBS 06D-A4	FLPBS 06F-A4	FLPBS 06G-A4						F10-B
No. 8	4.2mm	7.4	2.1		FLPBS 08F-A4	FLPBS 08G-A4	FLPBS 08H-A4	FLPBS 08I-A4	FLPBS 08J-A4			F15-B
No. 10	4.8mm	9.3	2.6		FLPBS 10F-A4	FLPBS 10G-A4	FLPBS 10H-A4	FLPBS 10I-A4	FLPBS 10J-A4			F25-B
No. 12	5.5mm	10.5	3.3			FLPBS 12G-A4		FLPBS 12I-A4	FLPBS 12J-A4	FLPBS 12K-A4	FLPBS 12L-A4	F27-B

### Material and Finish

**Material:** A4-70 Minimum Tensile Strength 700N/mm<sup>2</sup>

**Heat Treatment:** None

**Finish:** Passivated

A4-70  
Stainless  
Steel

The designation A4-70 derives from "A" meaning the material is a cold worked austenitic stainless, The "70" denotes the minimum tensile strength to be met by the finished part.

Therefore, A4-70 is an austenitic, acid proof stainless grade (usually 316 material – 316 or 316L) which has been cold worked to provide a minimum tensile strength of 700N/mm<sup>2</sup> (MPa).


Grade 316 is the standard molybdenum-bearing grade. The molybdenum gives 316 better overall corrosion resistant properties and has resistance to pitting and crevice corrosion in a range of atmospheric environments and chloride and other corrosive media.

With it's excellent corrosion resistance, A4 Stainless is perfect for both internal and external applications, especially marine environments, the food industry and medical/health equipment.

### Additional Information

**Installation:** 5-Lobe Pin - see video

**Removal:** 2-Way Removable Screw

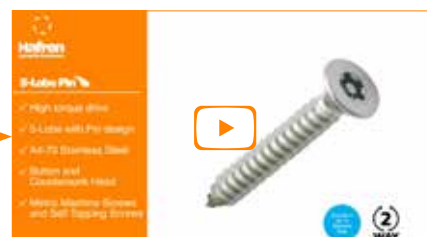

Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.