


6-Lobe Pin



6-Lobe Pin - Countersunk Machine Screw - A2 Stainless Steel



Dimensions (mm)

Box QTY 100

DIAMETER Thread Pitch	LENGTH																		DRIVER SIZE
	Dk	K	6 mm	8 mm	10 mm	12 mm	16 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	50 mm	55 mm	60 mm	70 mm	80 mm	
M3 x 0.5	5.6	2.0	RTCM 0306	RTCM 0308	RTCM 0310	RTCM 0312	RTCM 0316	RTCM 0320	RTCM 0325										T10
M4 x 0.7	7.8	2.3	RTCM 0406	RTCM 0408	RTCM 0410	RTCM 0412	RTCM 0416	RTCM 0420	RTCM 0425	RTCM 0430		RTCM 0440	RTCM 0445	RTCM 0450			RTCM 0470		T20
M5 x 0.8	9.8	2.8		RTCM 0508	RTCM 0510	RTCM 0512	RTCM 0516	RTCM 0520	RTCM 0525	RTCM 0530		RTCM 0540	RTCM 0545	RTCM 0550		RTCM 0560		RTCM 0580	T25
M6 x 1.0	11.6	3.3		RTCM 0608	RTCM 0610	RTCM 0612	RTCM 0616	RTCM 0620	RTCM 0625	RTCM 0630	RTCM 0635	RTCM 0640		RTCM 0650		RTCM 0660		RTCM 0680	T30
M8 x 1.25	15.8	5.0					RTCM 0816	RTCM 0820	RTCM 0825	RTCM 0830		RTCM 0840		RTCM 0850	RTCM 0855	RTCM 0860		RTCM 0880	T40
M10 x 1.5	19.7	5.1							RTCM 1025		RTCM 1035	RTCM 1040		RTCM 1050		RTCM 1060		RTCM 1080	T45

Material and Finish


Material: A2 Stainless Steel
Heat Treatment: None
Finish: Passivated

A2
Stainless
Steel

Additional Information

Installation: 6-Lobe Pin - see video

Removal: 2-Way Removable Screw

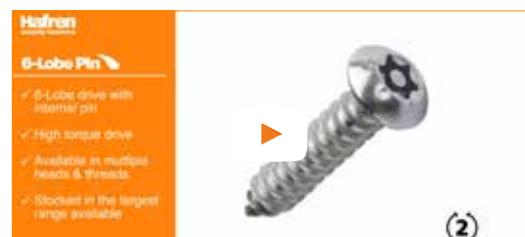

Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.