




Clutch Head - Countersunk Head Woodscrews - Bright Zinc Plated Steel

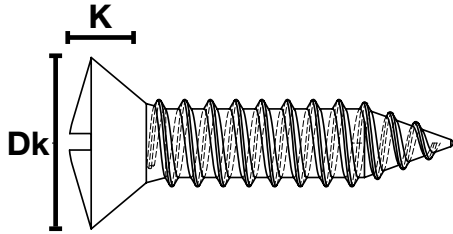

Dimensions (mm)

BOX QTY 200

LENGTH \ DIAMETER	Dk	K	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
			19mm	25mm	32mm	38mm	50mm	63mm	75mm
No. 6	7.0	3.5	CHCW06F	CHCW06G					
No. 8	8.3	4.6	CHCW08F	CHCW08G	CHCW08H	CHCW08I	CHCW08J		
No. 10	9.3	5.0		CHCW10G	CHCW10H	CHCW10I	CHCW10J		
No. 12	11.0	5.4				CHCW12I	CHCW12J	CHCW12K	CHCW12L

Material and Finish

Material: Mild Steel
Heat Treatment: None
Finish: Bright Zinc Plated (Cr3)




Material Specification		
Raw Material	Core Hardness	Case Hardness
Steel C1018	300-400 HV	600 HV min

Zinc is an electrodeposited lightweight plating that gives a sacrificial protection to underlying substrates (carbon steel). This method lays a thin layer of zinc over the surface meaning the zinc plating would corrode in preference to the substrate and therefore protecting the covered steel product.

Salt Spray (hrs)		
Thickness and Passivation	White Rust	Red Rust
3µ CR3+	24	72

Additional Information

Installation: Clutch Head - see video
Removal: 1-Way Removable Screw

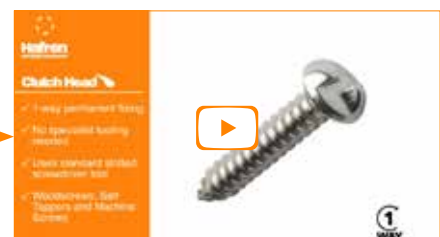

Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.