


Sentinel® - Countersunk Head Woodscrews - Bright Zinc Plated Steel

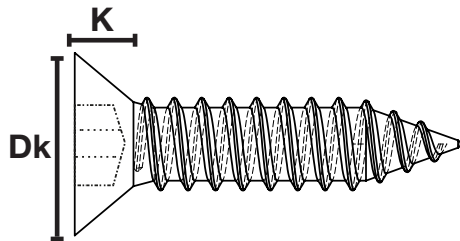

Dimensions (mm)

DIAMETER	LENGTH	Dk	K	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	DRIVER SIZE
				19mm	25mm	32mm	38mm	50mm	63mm	75mm	
No. 6	3.5mm	6.8	2.5	STCW06F	STCW06G						PZ2
No. 8	4.2mm	8.4	2.8	STCW08F	STCW08G	STCW08H	STCW08I	STCW08J			PZ2
No. 10	4.8mm	9.8	3.5		STCW10G	STCW10H	STCW10I	STCW10J	STCW10K		PZ2
No. 12	5.5mm	11.7	4.2				STCW12I	STCW12J	STCW12K	STCW12L	PZ3

Material and Finish

Material: Mild Steel
Heat Treatment: None
Finish: Bright Zinc Plated (CR-3)



Material Specification		
Raw Material	Core Hardness	Case Hardness
Steel C1018	300-400 HV	600 HV min


Zinc is an electrodeposited lightweight plating that gives a sacrificial protection to underlying substrates (carbon steel).

This method lays a thin layer of zinc over the surface meaning the zinc plating would corrode in preference to the substrate protecting the covered steel product.

Salt Spray (hrs)		
Thickness and Passivation	White Rust	Red Rust
3µ CR3+	24	72

Additional Information

Installation: Sentinel® - see video
Removal: 1-Way Removable Screw

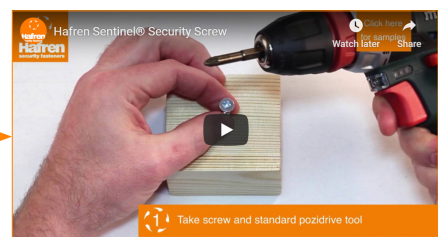

Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.